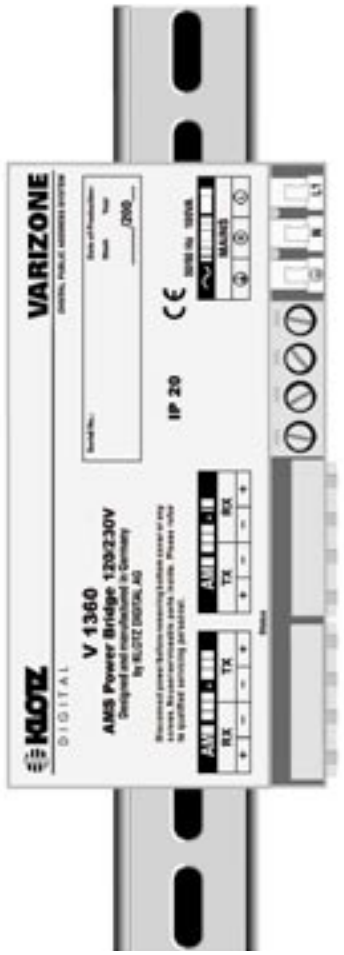

V1360

Description

The Power Bridge powers the AMS modules which are following the Power Bridge and refreshes the bus signal. The PSU and the internal LDR is individually monitored even in case of loss of AC power supply.

Main Features

- Top hat rail mounted or with mounting accessory V1152
- Bus driver for distances up to 200 m (600 ft)
- Galvanic isolation of input and output
- 80 Watt output power (24V)
- Status LED
- Second unit can be installed in parallel for redundancy

Option

V 1152	Mounting accęssory

PowerBridge Single Mode

V 1170A	Termination for J-Y(ST)Y cable 90 Ohm
V 1170B	Termination for Belden cable FE5441 60 Ohm
V 1170C	Termination for CAT5 cable 100 Ohm

PowerBridge Split Mode

V 1170AS	Termination for J-Y(ST)Y cable 90 Ohm
V 1170BS	Termination for Belden cable FE5441 60 Ohm
V 1170CS	Termination for CAT5 cable 100 Ohm

Specifications

AC input 1	20 / 230V
Power Output	80 Watts / 24V
Connector type (Bus Out)	Phoenix MSTB 2,5/4-ST-5,08
Connector type (Bus In)	Phoenix MSTB 2,5/4-ST-5,08
Mains Terminalblock	
Dimensions	Width: 157 mm / 6.18"
	Height: 61.5 mm / 2.42"
	Depth: 86 mm / 3.38"

Specifications subject to change without notice

Atlas Sound
1601 JACK MCKAY BLVD. / ENNIS, TEXAS 75119 U.S.A.
TELEPHONE: (800) 876-3333 / FAX (800) 765-3435
AtlasSound.com
Technology by Klotz Digital.

© 2004 Atlas Sound LP Printed in U.S.A. 000604 ATS001839 RevA 6/04 SL6-2042